



briteair Staircase Displacement Outlet

Suitable for mounting in the floor to supply air within auditoriums and general assembly rooms.

The low velocity of the supply air displaces the warm, polluted air leaving a comfortable environment for the occupant. The calibrated perforated baffle acts as a self balancing damper ensuring an even distribution of the supply air from a floor void when serving a number of outlets.

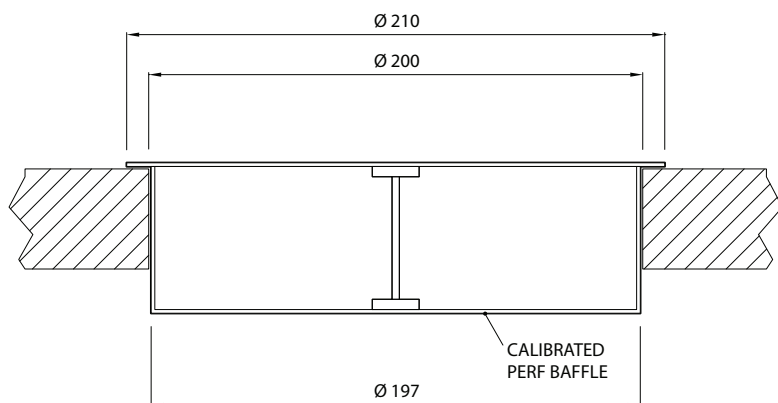

Possible variations:

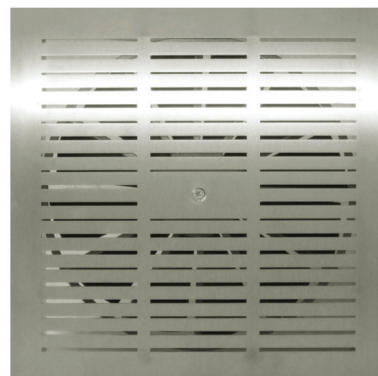

How to Order

Type	Damper	Frame	RAL Colour
BSF - Q	MS - Mild Steel	200 Dia	e.g. RAL 9010
	SS - Stainless Steel		

e.g. 10 No BFS - Q - 200 Dia - RAL 7037

Performance Data

Performance Data - Floor Swirl Diffuser						
Air Volume l/s	15	20	25	30	35	40
Pressure Drop Pa	5	8	12	16	23	28
Noise Level db (A)	10	16	22	26	30	34

Please contact our **Sales Office** on **01924 444 174** for selection guidance on the above.



Briteair Systems Ltd

Unit 21 Smithies Mill, 885 Bradford Road, Batley, West Yorkshire WF17 8NN

Telephone: **01924 444 174** | Fax: 01924 476 600 | www.briteair.co.uk